

## QNR8 = BQ803E

### Product Specification

One-page quad display, up to 8 camera inputs

Picture Update Rate: 30 Field per second

Horizontal Resolution: 700 Pixel Min for Full Screen

Digital Memory: 1024 x 512 for Full Screen

Digital Quantity: 8 bit (256 steps Gray Scale)

Video format: EIR or CCIR Monochrome Video signal

Video input: 8 camera inputs, adjustable ,

75 ohm terminated

Video Output: 2 Video outputs,

Full Screen or Quad Screen

Monitor Output, 75 ohm terminated

Quad, 75 ohm terminated

Auto Scan Time: 1-30 Sec

Power Input: DC 12V 500mA

Power Consumption : within 5 Watts Max


Dimension (L x W x H): 250 x 210 x45 mm

Paper Case Dimension (L x W x H):

272 x 232 x 56 mm

## USER MANUAL


### 1.0 Front Panel Keypads

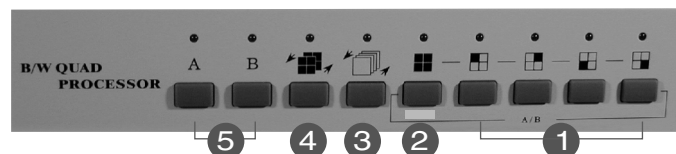


#### 1 .1 Full Screen Keys

Press any key, the quarter subscreen will be turning into a full screen display.


#### 1 .2 Quad Screen

Press  key, the live quad pictures will be displayed on the main monitor and recording output for VCR.

#### 1 .3 Sequential Switching

Press  key leading into auto sequential switching mode.


#### 1 .4 Sequential Page A/B Switch

Press  to sequentially switch page A/B.

#### 1 .5 Page A/B Switch

Press A(B), the live pictures from page A(B) will be displayed on the main monitor and VCR output for recording.

### 2 .0 Back Panel Connection

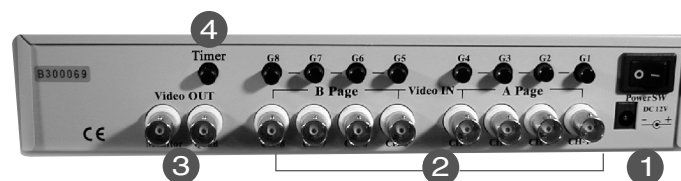

#### 2 .1 Power Switch & Connectors

DC/AC Jack: input is DC 12 V 500mA, positive pole in jack center.

#### 2 .2 Video Input

Connect Camera video out to this connector by a 75 ohm coaxial cable. Adjust brightness by G1 to G8.

#### 2 .3 Video Output

Monitor: Connect this output port to the monitor by 75 ohm coaxial cable.

QUAD: Connect this output port to video recorder by 75 ohm coaxial cable.

#### 2.4 Switch Time Setup

Adjust VR button clockwise or counter clockwise to change "switch time interval".

Clockwise: Longer switch interval

Counter Clockwise: Shorter switch interval